




NorthStar heavy duty batteries excel at providing superior vibration resistance, high cranking amps and high reserve capacity. No other battery does more.

- Pure lead AGM technology delivers exceptional CCA ratings and reserve capacity cycling ability
- Quick starting every time
- Cycles over 900 times at 50% depth of discharge
- Faster recharge than conventional batteries
- Proudly made in the USA at our state-of-the-art battery plant
- OEM fit is ensured - built to exact BCI standards
- Housed in advanced plastics for durability performance and heat resistance
- Advanced AGM construction means no water levels to check or terminals to clean
- Approved as non-hazardous cargo for ground sea and air transport DOT 49CFR173.159(d), (i) and (ii)

SMS-AGM8DK-S


Nominal Technical Specifications

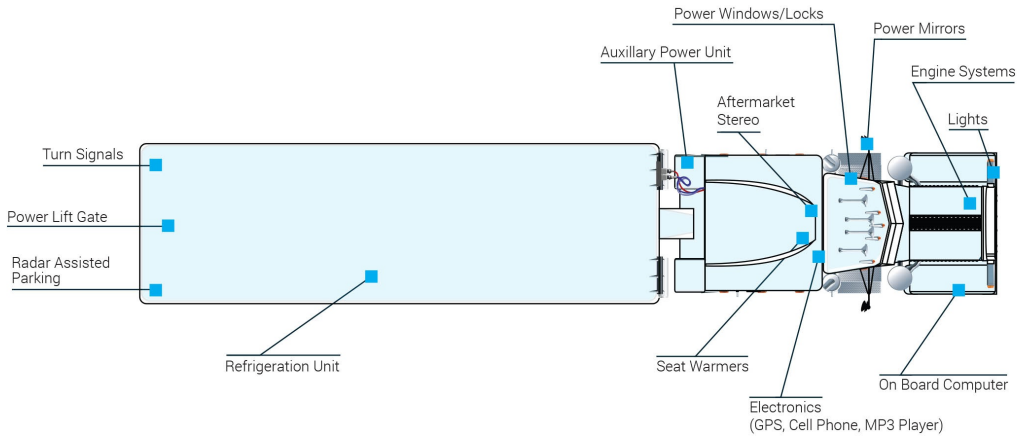

Technical data

Terminal configuration	Threaded
Terminal illustration	
Pulse cranking amps	3125 A
CCA rating at -18°C (0°F)	2250 A
CA/MCA rating at 0°C (32°F)	2700 A
Reserve capacity	500 min
Capacity - 20 hour rate (1.75 vpc)	228 Ah
Internal resistance	1.5 mΩ @ 25°C (77°F)
Short circuit current	7500 A
Warranty	3 years full
Quantity per layer	6
Quantity per pallet	12

Technical Drawing

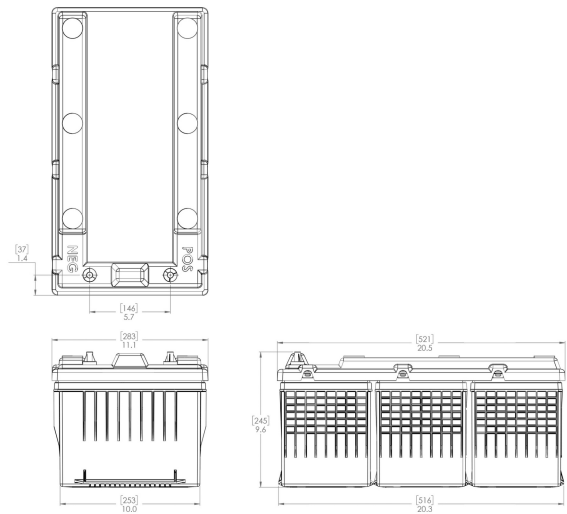

All NorthStar batteries are compliant with Battery Council International standards, UL approved and UN2800 certified. NorthStar is registered to ISO 9001 and ISO 14001.

Distributed by:

NorthStar Battery Company LLC
 4000 Continental Way
 Springfield, MO, 65803,
 United States of America
 info@northstarbattery.com
 Tel: +1 417 575 8200
 Fax: +1 417 575 8250

QUALITY ASSURED
ISO 9001

