




NorthStar heavy duty batteries excel at providing superior vibration resistance, high cranking amps and high reserve capacity. No other battery does more.

- Pure lead AGM technology delivers exceptional CCA ratings and reserve capacity cycling ability
- Quick starting every time
- Cycles over 900 times at 50% depth of discharge
- Faster recharge than conventional batteries
- Proudly made in the USA at our state-of-the-art battery plant
- OEM fit is ensured - built to exact BCI standards
- Housed in advanced plastics for durability performance and heat resistance
- Advanced AGM construction means no water levels to check or terminals to clean
- Approved as non-hazardous cargo for ground sea and air transport DOT 49CFR173.159(d), (i) and (ii)

SMS-AGM8DK


Nominal Technical Specifications

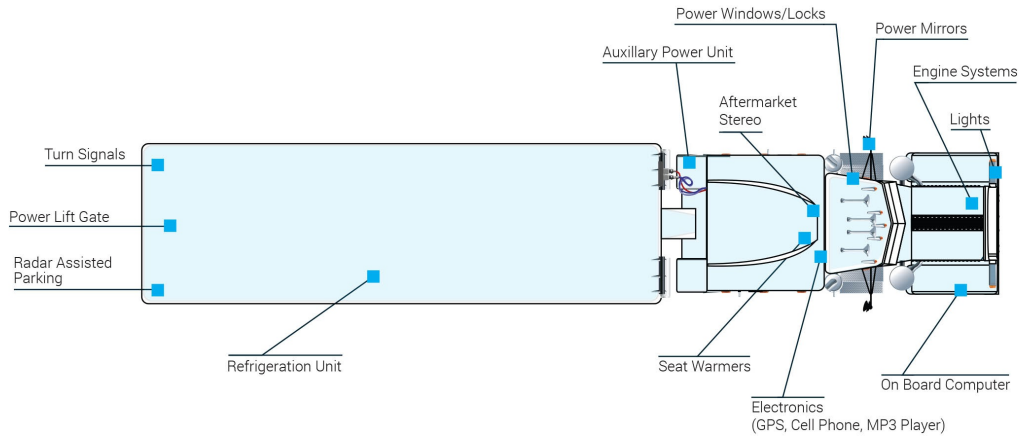

Technical data

| | |
|------------------------------------|----------------------|
| Terminal configuration | SAE |
| Terminal illustration | |
| Pulse cranking amps | 3125 A |
| CCA rating at -18°C (0°F) | 2250 A |
| CA/MCA rating at 0°C (32°F) | 2700 A |
| Reserve capacity | 500 min |
| Capacity - 20 hour rate (1.75 vpc) | 228 Ah |
| Internal resistance | 1.5 mΩ @ 25°C (77°F) |
| Short circuit current | 7500 A |
| Warranty | 3 years full |
| Quantity per layer | 6 |
| Quantity per pallet | 12 |

Technical Drawing

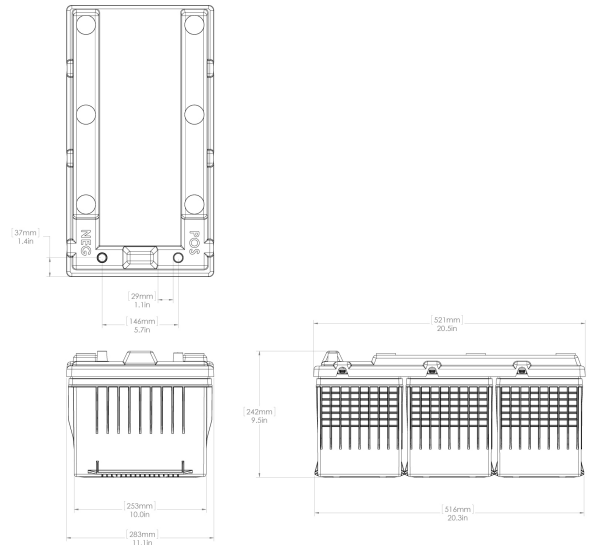

All NorthStar batteries are compliant with Battery Council International standards, UL approved and UN2800 certified. NorthStar is registered to ISO 9001 and ISO 14001.

Distributed by:

NorthStar Battery Company LLC
 4000 Continental Way
 Springfield, MO, 65803,
 United States of America
 info@northstarbattery.com
 Tel: +1 417 575 8200
 Fax: +1 417 575 8250

QUALITY ASSURED
ISO 9001

